

# Using ColdFrame's TextUML

Simon Wright *simon@pushface.org*

October 4, 2023

## Abstract

A worked example of the use of a textual form of UML to prepare translatable models.

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
<b>2</b>	<b>Worked Example: Simple Buttons</b>	<b>2</b>
2.1	Enumerations . . . . .	4
2.2	Imported Types . . . . .	4
2.3	Signals . . . . .	5
2.4	Class Button . . . . .	6
2.4.1	Button attributes . . . . .	6
2.4.2	Button operations . . . . .	7
2.4.3	Button state machine . . . . .	10
2.5	Class LED . . . . .	13
2.5.1	LED attributes . . . . .	14
2.5.2	LED operations . . . . .	14
2.6	Associations . . . . .	15
<b>3</b>	<b>TextUML tokens</b>	<b>15</b>
<b>4</b>	<b>Syntax</b>	<b>16</b>
<b>5</b>	<b>Files</b>	<b>24</b>
<b>6</b>	<b>Macros</b>	<b>24</b>
<b>7</b>	<b>Definitions</b>	<b>24</b>

# 1 Introduction

[ColdFrame](#) is an open-source code generator backend for use with UML tools, targeted at [Ada](#).

Until recently (2019) the UML tool of choice has been [ArgoUML](#); it is still being worked on, but the released versions don't work on newer macOS releases, and the development version only runs from an awkward command line interface.

The [TextUML](#) project is a Java-based tool to encode UML models in textual form. It goes beyond the aims of this project, in that it provides an action language. This means that the whole application can be written in TextUML and executable code can be generated from it.

ColdFrame doesn't go as far as this: it generates a framework, which can call up user code in the form of separate subprograms. Recently, it's been made possible to include some user code (in Ada) in the model.

This document has been generated using [nuweb.py](#), with conversion to PDF via [TeX Live](#).

## 2 Worked Example: Simple Buttons

The syntax of ColdFrame's version of TextUML is reproduced in [Section 4](#).

A TextUML model can contain multiple [domains](#). It acts only as a holder; its name has no significance. This is a 'file' scrap (the introductory @o), as encoded in the source web, which results in the other scraps in the document being 'tangled' into the file indicated.

```
@o textuml.tuml @{
(*)
  This is a model comment, which appears before the element concerned
  and will be included in the output.
*)
/* This is a textual comment, which will be ignored. */
model TextUML\_Demonstration;
  @< The domains @>
end.
@}
```

It gets 'woven' as

```
"textuml.tuml" 2≡
(*)
  This is a model comment, which appears before the element concerned
  and will be included in the output.
*)
/* This is a textual comment, which will be ignored. */
model TextUML_Demonstration;
  ⟨ The domains 3 ⟩
end.
◇
```

If you were generating the TextUML file by hand, you'd write documentation as model comments. Here, they've been expressed in the document instead, to improve readability.

The `Simple_Buttons` domain (the only one in this model) is intended for demonstrating ColdFrame's use in Ravenscar systems.

Because sampler boards have very few buttons and user-accessible LEDs, the design is very restricted. A Button can receive a short push (less than a quarter of a second) or a long push; after a short push, it's 'set' for 5 seconds; after a long push, it's 'set' until another push. A Button can be wired to control one or more LEDs; an LED can be wired to be controlled by one or more Buttons.

In TextUML, a domain is a package with the *annotation* `[domain]` ("annotation" is the TextUML word for *stereotype*). Other ways of decorating the model elements are *modifiers*, which are (reserved) keywords in the syntax; for example, you could specify that an attribute is identifying either by using the modifier `id` or the annotation `[\id]` (the backslash is removed during processing, but allows you to use otherwise-reserved identifiers).

A domain package can have nested packages, whose contents are incorporated directly into the domain.

```
< The domains 3 > ≡  
  [domain]  
  package Simple_Buttons;  
    < SB.Enumerations 4a, ... >  
  
    < SB.Imported types 4c, ... >  
  
    < SB.Signals 5a, ... >  
  
    < SB.Classes 6a, ... >  
  
    < SB.Associations 15a >  
  end;  
  ◇
```

Fragment referenced in 2.

Users: `Simple_Buttons` never used.

Signals correspond to ColdFrame's [events](#).

A [class](#) typically is an abstraction of something in the domain of interest. It represents the common properties and behaviour shared by all instances of the class.

An [attribute](#) holds a property of an object (either one per instance, for example the Accession Number of a Book in a Library, or per class, for example the next Accession Number to be used).

The purpose of [operations](#) is to implement the actual functionality of the domain.

An [association](#) is a relationship between two classes in the model (it is possible, though uncommon, to have a *reflexive* association between a class and itself, e.g. *Action is-a-consequence-of Action*).

## 2.1 Enumerations

This enumeration names the buttons. Only B1 will be used.

$\langle SB.Enumerations\ 4a \rangle \equiv$

```
enumeration Button_Name
  B1,
  B2
end;
◇
```

Fragment defined by [4ab](#).

Fragment referenced in [3](#).

Users: Button\_Name in [6b](#).

This enumeration names the LEDs. Only L1 will be used.

$\langle SB.Enumerations\ 4b \rangle \equiv$

```
enumeration LED_Name
  L1,
  L2
end;
◇
```

Fragment defined by [4ab](#).

Fragment referenced in [3](#).

Users: LED\_Name in [14ad](#).

## 2.2 Imported Types

This imported type is used by the supporting Digital IO domain to report input (switch) state changes. The annotation [imported] includes a tagged value (tag `imported`, value `Digital_IO`).

$\langle SB.Imported\ types\ 4c \rangle \equiv$

```
[imported (imported = Digital_IO)]
datatype Input_Signal_State;
◇
```

Fragment defined by [4cd](#).

Fragment referenced in [3](#).

Users: Input\_Signal\_State in [9c](#).

This type is used by the supporting Digital IO domain to name outputs (LEDs).

$\langle SB.Imported\ types\ 4d \rangle \equiv$

```
[imported (imported = Digital_IO)]
datatype Output_Signal;
◇
```

Fragment defined by [4cd](#).

Fragment referenced in [3](#).

Users: Output\_Signal in [14d](#).

## 2.3 Signals

As noted above, signals correspond to ColdFrame's events.

UML has them declared at package (domain) level, though ColdFrame's implementation actually declares the corresponding event types in the specification of the class where they're used (in this case, Button); hence the need, in general, to specify the target class here (suppose there was more than one class in the domain that had to receive events?). Note the namespace separator ::.

This event indicates that the button 'pushed' period (after a short push) has expired.

```
 $\langle SB.Signals\ 5a \rangle \equiv$   
    signal Button::Lit_Timeout;  
    ◇
```

Fragment defined by [5abcd](#).

Fragment referenced in [3](#).

Users: Button::Lit\_Timeout in [12b](#).

Uses: Button [6a](#).

This event indicates that the button has been pushed.

```
 $\langle SB.Signals\ 5b \rangle \equiv$   
    signal Button::Push;  
    ◇
```

Fragment defined by [5abcd](#).

Fragment referenced in [3](#).

Users: Button::Push in [5c](#), [11b](#), [12ab](#), [13a](#).

Uses: Button [6a](#).

This event indicates that the button has been pushed long enough to make this a long push.

```
 $\langle SB.Signals\ 5c \rangle \equiv$   
    signal Button::Push_Timeout;  
    ◇
```

Fragment defined by [5abcd](#).

Fragment referenced in [3](#).

Users: Button::Push\_Timeout in [12a](#).

Uses: Button [6a](#), Button::Push [5b](#).

This event indicates that the button has been released.

```
 $\langle SB.Signals\ 5d \rangle \equiv$   
    signal Button::Release;  
    ◇
```

Fragment defined by [5abcd](#).

Fragment referenced in [3](#).

Users: Button::Release in [11b](#), [12a](#), [13a](#).

Uses: Button [6a](#).

## 2.4 Class Button

A Button controls a number of LEDs. When the Button is ‘set’, the LEDs related by A1 are lit.

Buttons respond to both ‘short’ and ‘long’ pushes.

After a long push, the button remains set until it’s pushed again (long or short).

After a short push, the Button remains set for a period, which can be extended by a further short push or a long push.

```
⟨ SB.Classes 6a ⟩ ≡  
  class Button  
    ⟨ SB.Button attributes 6b, ... ⟩  
  
    ⟨ SB.Button operations 7c, ... ⟩  
  
    ⟨ SB.Button state machine 10 ⟩  
  end;  
  ◇
```

Fragment defined by 6a, 13b.

Fragment referenced in 3.

Users: Button in 5abcd, 10, 11b, 12ab, 13a, 15a.

### 2.4.1 Button attributes

This identifying attribute (the id modifier) is the name of the Button.

```
⟨ SB.Button attributes 6b ⟩ ≡  
  id attribute Name : Button_Name;  
  ◇
```

Fragment defined by 6bc, 7ab.

Fragment referenced in 6a.

Users: Name in 14d.

Uses: Button\_Name 4a.

This attribute holds the time when the Button was pushed, so that the Lit timeout can run from this initial time rather than (e.g.) when the Button was released.

```
⟨ SB.Button attributes 6c ⟩ ≡  
  attribute Pushed_Time : Time;  
  ◇
```

Fragment defined by 6bc, 7ab.

Fragment referenced in 6a.

Users: Pushed\_Time in 7d.

This ColdFrame timer controls how long the Button needs to remain pushed before transition to the Held state.

```

⟨ SB.Button attributes 7a ⟩ ≡
  attribute Lit_Timer : Timer;
  ◇

```

Fragment defined by [6bc](#), [7ab](#).

Fragment referenced in [6a](#).

Users: Lit\_Timer in [9a](#).

This timer controls how long the Button needs to remain pushed before transition to the Held state.

```

⟨ SB.Button attributes 7b ⟩ ≡
  attribute Pushed_Timer : Timer;
  ◇

```

Fragment defined by [6bc](#), [7ab](#).

Fragment referenced in [6a](#).

Users: Pushed\_Timer in [8ab](#).

## 2.4.2 Button operations

The state of the button has changed; tell the controlled LEDs to reevaluate their own states (by checking whether any of the Buttons they are controlled by is set). Note the modifier **private**.

```

⟨ SB.Button operations 7c ⟩ ≡
  private operation Changed();
  ◇

```

Fragment defined by [7cd](#), [8abc](#), [9abc](#).

Fragment referenced in [6a](#).

Users: Changed in [11b](#), [12a](#).

This operation stores the time at which the Button was pushed: the Lit timeout runs from this time, not the time of Button release.

This operation is short enough that we can include its code here, within the curly braces.

```

⟨ SB.Button operations 7d ⟩ ≡
  private operation Note_Pushed_Time();
  {
    This.Pushed_Time := ColdFrame.Project.Calendar.Clock;
  }
  ◇

```

Fragment defined by [7cd](#), [8abc](#), [9abc](#).

Fragment referenced in [6a](#).

Users: Note\_Pushed\_Time in [12a](#).

Uses: Pushed\_Time [6c](#).

This operation sets the Pushed timeout, again including the code in the model. The indentation will be preserved (actually, relative to the first non-space character of the first line)

```

⟨ SB.Button operations 8a ⟩ ≡
  private operation Set_Pushed_Timeout();
  {
    ColdFrame.Project.Events.Set
      (The_Timer => This.Pushed_Timer,
       On => Events.Dispatcher,
       To_Fire => new Push_Timeout (This),
       After => 0.25);
  }
  ◇

```

Fragment defined by [7cd](#), [8abc](#), [9abc](#).

Fragment referenced in [6a](#).

Users: `Set_Pushed_Timeout` in [12a](#).

Uses: `Pushed_Timer` [7b](#).

This operation clears the Pushed timeout.

```

⟨ SB.Button operations 8b ⟩ ≡
  private operation Clear_Pushed_Timeout();
  {
    ColdFrame.Project.Events.Unset
      (The_Timer => This.Pushed_Timer,
       On => Events.Dispatcher);
  }
  ◇

```

Fragment defined by [7cd](#), [8abc](#), [9abc](#).

Fragment referenced in [6a](#).

Users: `Clear_Pushed_Timeout` in [12b](#).

Uses: `Pushed_Timer` [7b](#).

This operation sets the Lit timeout. It's called on button release after a short push, but the time is relative to the time when the button was pushed.

```

⟨ SB.Button operations 8c ⟩ ≡
  private operation Set_Lit_Timeout();
  ◇

```

Fragment defined by [7cd](#), [8abc](#), [9abc](#).

Fragment referenced in [6a](#).

Users: `Set_Lit_Timeout` in [12b](#).

This operation clears the Lit timeout.



```

< SB.Button operations 9a > ≡
private operation Clear_Lit_Timeout();
{
    ColdFrame.Project.Events.Unset
        (The_Timer => This.Lit_Timer,
         On => Events.Dispatcher);
}
◇

```

Fragment defined by [7cd](#), [8abc](#), [9abc](#).

Fragment referenced in [6a](#).

Users: `Clear_Lit_Timeout` in [12c](#).

Uses: `Lit_Timer` [7a](#).

This operation indicates whether the Button is set or not. It's set if it's in any of the states `Pushed`, `Held`, `Timed`, `Pushed_Again`.

Note, the code is emitted in the body of the Ada subprogram, so if any local variables are needed a `declare` block has to be used (in this particular case, a one-liner would actually have been possible).

```

< SB.Button operations 9b > ≡
public operation Is_Set(): Boolean;
{
    declare
        Set_In_State : constant array (State_Machine_State_T) of Boolean
            := (Pushed | Held | Timed | Pushed_Again => True,
               others => False);
    begin
        return Set_In_State (This.State_Machine_State);
    end;
}
◇

```

Fragment defined by [7cd](#), [8abc](#), [9abc](#).

Fragment referenced in [6a](#).

Users: `Is_Set` never used.

Uses: `Held` [13a](#), `Pushed` [12a](#), `Pushed_Again` [12c](#), `Timed` [12b](#).

This operation acts as receiver of state changes from `Digital_IO`, via `Input Signal State Callback`. The annotation `[callback]` triggers the necessary event generation. The modifier `static` isn't strictly necessary, since `ColdFrame` would automatically generate a class operation anyway, but avoids a warning.

Calls the instance `Changed` so the Button can take the appropriate action.

```

< SB.Button operations 9c > ≡
[callback]
private static operation Receive_Change(S : Input_Signal_State);
◇

```


Fragment defined by [7cd](#), [8abc](#), [9abc](#).

Fragment referenced in [6a](#).

Users: `Receive_Change` never used.

Uses: `Input_Signal_State` [4c](#).

Figure 1: Generated Button statechart

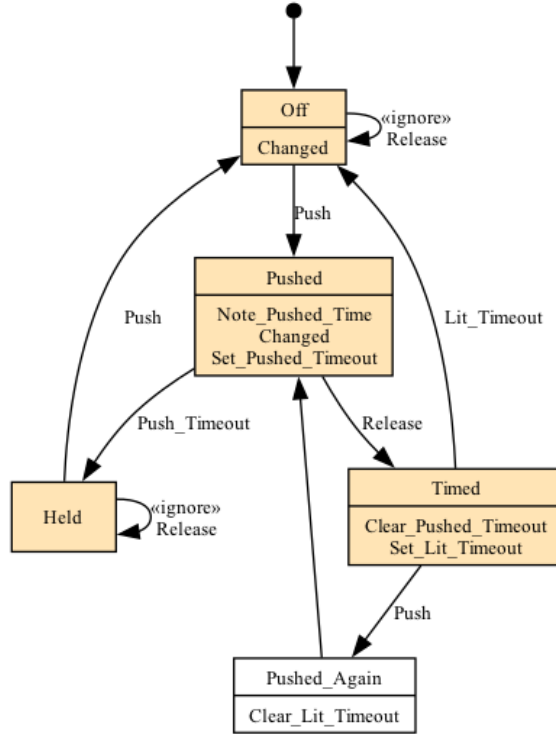

### 2.4.3 Button state machine

This is a [Moore model state machine](#); all the actions take place on entry to a state. See Figure 1 for the generated statechart.

ColdFrame also supports [Mealy model state machines](#), where all the actions take place on transitions, as well as mixed machines.

```

⟨ SB.Button state machine 10 ⟩ ≡
  statemachine Button
    ⟨ SB.Button states 11a, ... ⟩
  end;
  ◇

```

Fragment referenced in [6a](#).

Uses: [Button 6a](#).

This is the initial state (indicated by the `initial` modifier). It performs a completion transition to Off.

```

⟨ SB.Button states 11a ⟩ ≡
  initial state Initial
    transition to Off;
  end;
◇

```

Fragment defined by [11ab](#), [12abc](#), [13a](#).  
 Fragment referenced in [10](#).  
 Users: **Initial** never used.  
 Uses: **Off** [11b](#).

In the state Off, the button is off, waiting for a Push. If this state was entered as a result of a Push in the Held state, there will be a corresponding Release, which is ignored (the annotation [ignore]).

On entry, **Changed** is called to tell the connected LEDs that they need to reconsider whether they should be lit.

```

⟨ SB.Button states 11b ⟩ ≡
  state Off
    entry(Changed);
    transition on signal(Button::Push) to Pushed;
    [ignore] transition on signal(Button::Release) to Off;
  end;
◇

```

Fragment defined by [11ab](#), [12abc](#), [13a](#).  
 Fragment referenced in [10](#).  
 Users: **Off** in [11a](#), [12b](#), [13a](#).  
 Uses: **Button** [6a](#), **Button::Push** [5b](#), **Button::Release** [5d](#), **Changed** [7c](#), [14c](#), **Pushed** [12a](#).

In the state Pushed, the button is on, awaiting a Push\_Timeout, which transitions to the Held state (a long push), or a Release (a short push), which transitions to the Timed state.

The entry actions are

1. Note\_Pushed\_Time: note when the button was pushed, so that if it's released before the coming Push\_Timeout, this time can be used to determine how long the button remains 'pushed'.
2. Changed: tell the connected LEDs that they need to reconsider whether they should be lit.
3. Set\_Pushed\_Timeout: if this timeout occurs, this was a long push.

$\langle SB.Button\ states\ 12a \rangle \equiv$

```
state Pushed
  entry(Note_Pushed_Time; Changed; Set_Pushed_Timeout);
  transition on signal(Button::Push_Timeout) to Held;
  transition on signal(Button::Release) to Timed;
end;
◇
```

Fragment defined by 11ab, 12abc, 13a.

Fragment referenced in 10.

Users: Pushed in 9b, 11b, 12c.

Uses: Button 6a, Button::Push 5b, Button::Push\_Timeout 5c, Button::Release 5d, Changed 7c, 14c, Held 13a, Note\_Pushed\_Time 7d, Set\_Pushed\_Timeout 8a, Timed 12b.

In the state Timed, the button is on after a short push, awaiting a Lit\_Timeout (which transitions to the Off state) or another Push (which transitions to Pushed\_Again).

The entry actions are

1. Clear\_Pushed\_Timeout: The Pushed\_Timeout that was started in the state Pushed is cancelled, because it's been overtaken by the short push that just occurred.
2. Set\_Lit\_Timeout: This determines how long the button remains 'pushed' for.

$\langle SB.Button\ states\ 12b \rangle \equiv$

```
state Timed
  entry(Clear_Pushed_Timeout; Set_Lit_Timeout);
  transition on signal(Button::Push) to Pushed_Again;
  transition on signal(Button::Lit_Timeout) to Off;
end;
◇
```

Fragment defined by 11ab, 12abc, 13a.

Fragment referenced in 10.

Users: Timed in 9b, 12a.

Uses: Button 6a, Button::Lit\_Timeout 5a, Button::Push 5b, Clear\_Pushed\_Timeout 8b, Off 11b, Pushed\_Again 12c, Set\_Lit\_Timeout 8c.

In the state Pushed\_Again, the button has been pushed during the timeout after a short push. Resets the timeout (in the entry action) and performs a completion transition to Pushed to start another check (this Push can be the start of another short push or a new long push).

$\langle SB.Button\ states\ 12c \rangle \equiv$

```
state Pushed_Again
  entry(Clear_Lit_Timeout);
  transition to Pushed;
end;
◇
```

Fragment defined by 11ab, 12abc, 13a.

Fragment referenced in 10.

Users: Pushed\_Again in 9b, 12b.

Uses: Clear\_Lit\_Timeout 9a, Pushed 12a.

In the state Held, the button is on, after a long push, awaiting another Push to transition to the Off state. The button is still pushed, so there will be a corresponding Release, which is ignored.

$\langle SB.Button\ states\ 13a \rangle \equiv$

```
state Held
  transition on signal(Button::Push) to Off;
  [ignore] transition on signal(Button::Release) to Held;
end;
◇
```

Fragment defined by [11ab](#), [12abc](#), [13a](#).

Fragment referenced in [10](#).

Users: Held in [9b](#), [12a](#).

Uses: Button [6a](#), Button::Push [5b](#), Button::Release [5d](#), Off [11b](#).

Note that the state model could have been cast as a mixed Moore-Mealy machine, by writing the state Timed as

```
@d SB.Button states @{
state Timed
  entry(Clear_Pushed_Timeout; Set_Lit_Timeout);
  transition on signal(Button::Push) to Pushed
    do (Clear_Lit_Timeout);
  transition on signal(Button::Lit_Timeout) to Off;
end;
@}
```

which implements the Clear\_Lit\_Timeout action as the (only) effect of the transition signalled by the Button::Pushed event, and eliminates the need for the Pushed\_Again state.

## 2.5 Class LED

An LED is lit when any of the Buttons it's controlled by is set.

$\langle SB.Classes\ 13b \rangle \equiv$

```
class LED
   $\langle SB.LED\ attributes\ 14a \rangle$ 

   $\langle SB.LED\ operations\ 14b,\ \dots \rangle$ 
end;
◇
```

Fragment defined by [6a](#), [13b](#).

Fragment referenced in [3](#).

Users: LED in [14d](#), [15a](#).

### 2.5.1 LED attributes

This attribute identifies the LED.

```
 $\langle SB.LED \text{ attributes } 14a \rangle \equiv$   
    id attribute Name : LED_Name;  
    ◇
```

Fragment referenced in 13b.

Users: Name in 14d.

Uses: LED\_Name 4b.

### 2.5.2 LED operations

This operation initialises the domain (this is indicated by the annotation [init]) by creating Button(s) and LED(s) as required, and associating them according to the required “circuit diagram”.

```
 $\langle SB.LED \text{ operations } 14b \rangle \equiv$   
    [init]  
    private static operation Initialize();  
    ◇
```

Fragment defined by 14bcd.

Fragment referenced in 13b.

Users: Initialize never used.

This operation is called from a controlling Button which has changed to evaluate whether the LED should be lit (if any of the controlling Buttons is set) or not.

```
 $\langle SB.LED \text{ operations } 14c \rangle \equiv$   
    public operation Changed();  
    ◇
```

Fragment defined by 14bcd.

Fragment referenced in 13b.

Users: Changed in 11b, 12a.

This operation maps the LED to the corresponding Digital\_IO output pin.

```
 $\langle SB.LED \text{ operations } 14d \rangle \equiv$   
    private operation Output_Signal_For_LED(): Output_Signal;  
    {  
        -- This isn't going to be very extendable, but there's only one  
        -- LED in this simple demo.  
        return LED_Name'Pos (This.Name);  
    }  
    ◇
```

Fragment defined by 14bcd.

Fragment referenced in 13b.

Users: Output\_Signal\_For\_LED never used.

Uses: LED 13b, LED\_Name 4b, Name 6b, 14a, Output\_Signal 4d.

## 2.6 Associations

This association relates each LED to the Button(s) it's controlled by.

Each Button controls one or more LEDs.

Each LED is controlled by one or more Buttons.

This is a many-to-many relationship, so ColdFrame requires that it be implemented as an Association Class, even though there are (as yet) no useful attributes for the Class part to contain.

```
< SB.Associations 15a > ≡  
  association_class A1  
    Button Controls LED[1,*];  
    LED Is_Controlled_By Button[1,*];  
  end;  
  ◇
```

Fragment referenced in [3](#).

Users: A1 never used.

Uses: Button [6a](#), LED [13b](#).

## 3 TextUML tokens

These are the tokens used (and, importantly, reserved) by TextUML. Those bolded correspond to [stereotypes](#) in ColdFrame.

abstract	enumeration	<b>null</b>	specializes
association	exception	on	state
association_class	false	operation	statemachine
attribute	<b>final</b>	out	static
<b>class</b>	<b>id</b>	package	terminate
component	in	primitive	to
<b>datatype</b>	initial	private	transition
do	inout	<b>protected</b>	true
end	interface	<b>public</b>	
<b>entry</b>	model	signal	

In most cases, there won't be a problem, but if you need to use one in an annotation (e.g. `[class]`, which at present is still needed in class signals and state machines – `static` should be allowed) you can either precede it with a backslash (`[\class]`) or capitalise it (`[Class]`).

Some of the ColdFrame stereotypes have hyphens, which isn't supported in TextUML because the name needs to be an identifier. Because of this, underscores in annotation names are translated to hyphens.

An example would be

```
"test.tuml" 15b≡  
  model test;  
    [domain_interface (name=test)]
```

```

package test_it;
  [\protected] public datatype prot
    operation set(value : integer);
    [\entry] operation get(out value : integer);
    private attribute value : integer := 42;
  end;
end;
end.
◇

```

## 4 Syntax

Note, this syntax doesn't include the tokens; they are the UPPER CASE elements below. In most cases, the actual token is the lower-case version of the element here (exceptionally, `NAMESPACE_SEPARATOR` is `::`).

```

start : \
      model_comment annotations model_heading \
      namespace_contents END DOT

model_heading : MODEL qualified_identifier SEMICOLON

qualified_identifier \
  : identifier NAMESPACE_SEPARATOR qualified_identifier
  | identifier

namespace_contents \
  : top_level_element namespace_contents
  | top_level_element

sub_namespace \
  : package_heading \
  namespace_contents END SEMICOLON

package_heading : PACKAGE qualified_identifier SEMICOLON

top_level_element \
  : model_comment annotations top_level_element_choice

top_level_element_choice \
  : association_class_def
  | association_def
  | class_def
  | datatype_def
  | enumeration_def
  | exception_def
  | primitive_def

```



```

    | signal_def
    | sub_namespace

single_type_identifier : qualified_identifier

type_identifier \
    : single_type_identifier optional_multiplicity
    | function_signature optional_multiplicity

optional_multiplicity \
    : L_BRACKET multiplicity_spec R_BRACKET
    | empty

multiplicity_spec \
    : multiplicity_value COMMA multiplicity_value
    | multiplicity_value

association_def \
    : annotations ASSOCIATION identifier association_role_decl_list \
      END SEMICOLON

association_class_def \
    : annotations ASSOCIATION_CLASS identifier \
      association_role_decl_list feature_decl_list \
      END SEMICOLON
    | annotations ASSOCIATION_CLASS identifier \
      association_role_decl_list \
      END SEMICOLON

association_multiplicity \
    : L_BRACKET multiplicity_spec R_BRACKET

association_role_decl_list \
    : association_role_decl association_role_decl

association_role_decl \
    : model_comment annotations \
      identifier identifier identifier association_multiplicity SEMICOLON

class_def : class_header feature_decl_list END SEMICOLON

class_header \
    : class_modifiers class_type identifier class_specializes_section

class_modifiers \
    : class_modifier_list
    | empty

```

```

class_modifier_list \
    : class_modifier class_modifier_list
    | class_modifier

class_modifier \
    : visibility_modifier
    | ABSTRACT

class_specializes_section \
    : SPECIALIZES class_specializes_list
    | empty

class_specializes_list \
    : identifier COMMA class_specializes_list
    | identifier

class_type \
    : CLASS
    | INTERFACE
    | COMPONENT

feature_decl_list \
    : feature_decl feature_decl_list
    | feature_decl

feature_decl \
    : model_comment annotations feature_modifiers feature_type

feature_modifiers \
    : feature_modifier_list
    | empty

feature_modifier_list \
    : feature_modifier feature_modifier_list
    | feature_modifier

feature_modifier \
    : visibility_modifier
    | STATIC
    | ABSTRACT
    | ID

visibility_modifier \
    : PUBLIC
    | PRIVATE
    | PACKAGE

```

```

| PROTECTED

feature_type \
  : state_machine_decl
  | operation_decl
  | attribute_decl

state_machine_decl \
  : STATEMACHINE identifier state_decls END SEMICOLON
  | STATEMACHINE state_decls END SEMICOLON

state_decls \
  : state_decl state_decls
  | state_decl

state_decl \
  : model_comment state_modifier STATE identifier state_behaviours \
    transition_decls END SEMICOLON
  | model_comment STATE identifier state_behaviours \
    transition_decls END SEMICOLON

state_modifier \
  : INITIAL
  | TERMINATE
  | FINAL

state_behaviours \
  : state_behaviour_list
  | empty

state_behaviour_list \
  : state_behaviour state_behaviour_list
  | state_behaviour

state_behaviour : ENTRY state_behaviour_definition SEMICOLON

state_behaviour_definition : simple_statement_block

transition_decls \
  : transition_decl_list
  | empty

transition_decl_list \
  : transition_decl transition_decl_list
  | transition_decl

transition_decl \

```

```

: model_comment annotations TRANSITION ON SIGNAL \
  L_PAREN qualified_identifier R_PAREN \
  TO identifier transition_effect_opt SEMICOLON
| model_comment annotations TRANSITION TO identifier \
  transition_effect_opt SEMICOLON

transition_effect_opt \
  : DO simple_statement_block
  | empty

simple_statement_block \
  : L_PAREN statement_list R_PAREN
  | identifier

statement_list \
  : identifier SEMICOLON statement_list
  | identifier

operation_body : OPERATION_BODY

operation_decl \
  : operation_header SEMICOLON operation_body
  | operation_header SEMICOLON

operation_header : OPERATION identifier signature

attribute_decl \
  : ATTRIBUTE identifier COLON type_identifier \
    initialization_expression_opt SEMICOLON

initialization_expression_opt \
  : initialization_expression
  | empty

initialization_expression : ASSIGNOP simple_initialization

simple_initialization : literal_or_identifier

function_signature : L_CURLY_BRACKET simple_signature R_CURLY_BRACKET

signature : L_PAREN param_decl_list R_PAREN optional_return_type

simple_signature \
  : L_PAREN simple_param_decl_list R_PAREN simple_optional_return_type
  | L_PAREN simple_param_decl_list R_PAREN

optional_return_type \

```

```

        : annotations simple_optional_return_type
        | empty

simple_optional_return_type : COLON type_identifier

param_decl_list \
    : param_decl COMMA param_decl_list
    | param_decl
    | empty

simple_param_decl_list \
    : simple_param_decl COMMA simple_param_decl_list
    | simple_param_decl
    | empty

param_decl : annotations parameter_modifiers simple_param_decl

simple_param_decl \
    : optional_parameter_name COLON type_identifier \
      initialization_expression_opt

optional_parameter_name \
    : identifier
    | empty

parameter_modifiers \
    : parameter_modifier parameter_modifiers
    | empty

parameter_modifier \
    : IN
    | OUT
    | INOUT

annotations \
    : L_BRACKET annotation_list R_BRACKET
    | empty

annotation_list \
    : annotation COMMA annotation_list
    | annotation

annotation \
    : qualified_identifier annotation_value_specs
    | qualified_identifier

annotation_value_specs \

```

```

        : L_PAREN annotation_value_spec_list R_PAREN

annotation_value_spec_list \
    : annotation_value_spec COMMA annotation_value_spec_list
    | annotation_value_spec

annotation_value_spec : identifier EQUALS annotation_value

annotation_value \
    : literal
    | qualified_identifier

datatype_def \
    : datatype_header feature_decl_list END SEMICOLON
    | datatype_header SEMICOLON

datatype_header : class_modifiers DATATYPE identifier

enumeration_def \
    : visibility_modifier ENUMERATION identifier \
      enumeration_literal_decl_list END SEMICOLON
    | ENUMERATION identifier \
      enumeration_literal_decl_list END SEMICOLON

enumeration_literal_decl_list \
    : enumeration_literal_decl enumeration_literal_decl_list_tail

enumeration_literal_decl : model_comment identifier

enumeration_literal_decl_list_tail \
    : COMMA enumeration_literal_decl_list
    | empty

exception_def \
    : visibility_modifier EXCEPTION identifier SEMICOLON
    | EXCEPTION identifier SEMICOLON

signal_def : signal_decl

signal_decl \
    : SIGNAL qualified_identifier signal_attributes END SEMICOLON
    | SIGNAL qualified_identifier SEMICOLON

signal_attributes \
    : signal_attribute_decl signal_attributes
    | signal_attribute_decl

```

```

signal_attribute_decl \
    : ATTRIBUTE identifier COLON type_identifier SEMICOLON

primitive_def \
    : visibility_modifier PRIMITIVE identifier SEMICOLON
    | PRIMITIVE identifier SEMICOLON

model_comment \
    : MODEL_COMMENT
    | empty

identifier : IDENTIFIER

literal \
    : boolean
    | number
    | STRING
    | NULL

literal_or_identifier \
    : literal
    | identifier

boolean \
    : TRUE
    | FALSE

number \
    : INTEGER
    | REAL

multiplicity_value \
    : INTEGER
    | MULT

```

## 5 Files

"test.tuml" Defined by 15b.

"textuml.tuml" Defined by 2.

## 6 Macros

⟨SB.Associations 15a⟩ Referenced in 3.  
⟨SB.Button attributes 6bc, 7ab⟩ Referenced in 6a.  
⟨SB.Button operations 7cd, 8abc, 9abc⟩ Referenced in 6a.  
⟨SB.Button state machine 10⟩ Referenced in 6a.  
⟨SB.Button states 11ab, 12abc, 13a⟩ Referenced in 10.  
⟨SB.Classes 6a, 13b⟩ Referenced in 3.  
⟨SB.Enumerations 4ab⟩ Referenced in 3.  
⟨SB.Imported types 4cd⟩ Referenced in 3.  
⟨SB.LED attributes 14a⟩ Referenced in 13b.  
⟨SB.LED operations 14bcd⟩ Referenced in 13b.  
⟨SB.Signals 5abcd⟩ Referenced in 3.  
⟨The domains 3⟩ Referenced in 2.

## 7 Definitions

A1: defined in 15a, never used.  
Button: defined in 6a, used in 5abcd, 10, 11b, 12ab, 13a, 15a.  
Button::Lit\_Timeout: defined in 5a, used in 12b.  
Button::Push: defined in 5b, used in 5c, 11b, 12ab, 13a.  
Button::Push\_Timeout: defined in 5c, used in 12a.  
Button::Release: defined in 5d, used in 11b, 12a, 13a.  
Button\_Name: defined in 4a, used in 6b.  
Changed: defined in 7c, 14c, used in 11b, 12a.  
Clear\_Lit\_Timeout: defined in 9a, used in 12c.  
Clear\_Pushed\_Timeout: defined in 8b, used in 12b.  
Held: defined in 13a, used in 9b, 12a.  
Initial: defined in 11a, never used.  
Input\_Signal\_State: defined in 4c, used in 9c.  
Intialize: defined in 14b, never used.  
Is\_Set: defined in 9b, never used.  
LED: defined in 13b, used in 14d, 15a.  
LED\_Name: defined in 4b, used in 14ad.  
Lit\_Timer: defined in 7a, used in 9a.  
Name: defined in 6b, 14a, used in 14d.  
Note\_Pushed\_Time: defined in 7d, used in 12a.  
Off: defined in 11b, used in 11a, 12b, 13a.  
Output\_Signal: defined in 4d, used in 14d.  
Output\_Signal\_For\_LED: defined in 14d, never used.  
Pushed: defined in 12a, used in 9b, 11b, 12c.  
Pushed\_Again: defined in 12c, used in 9b, 12b.  
Pushed\_Time: defined in 6c, used in 7d.



Pushed\_Timer: defined in 7b, used in 8ab.  
Receive\_Change: defined in 9c, never used.  
Set\_Lit\_Timeout: defined in 8c, used in 12b.  
Set\_Pushed\_Timeout: defined in 8a, used in 12a.  
Simple\_Buttons: defined in 3, never used.  
Timed: defined in 12b, used in 9b, 12a.